

# **EU-TYPE EXAMINATION CERTIFICATE**



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/154/161/09/21/1667

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment:

Manufacturer: **AIGLE INTERNATIONAL S.A** 

57 BOULEVARD DE MONTMORENCY,75016 PARIS

Description

PPE Type: a safety footwear

**Product reference:** T3855 - NASSIO M MTD S3, T3854 - NASSIO M

MTD S3

Article code:

Construction and material of outsole: Cement, EVA/Rubber Sole

**Pictures:** 





AIGLE



Classification: I Category: S3 WR HRO SRC

Size range: 39-48 Slip resistance: SRC

Insert nature: Non Metallic **Toecap nature : Non Metallic** At the date of certificate the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file index 01 dated from OCTOBER 2021

NOTA: Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation (UE) 2016/425, is not covered by this certificate.

Issued in Lyon by

Didier GUISADO

MARKIN

Certification and Quality Manager



In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective

Equipment and repealing the Directive 89/686/EEC.

www.ctcgroupe.com

cemarking@ctcgroupe.com

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France



Date of first issue: 01 October 2021

End of validity date: 01 October 2026

### **AIGLE INTERNATIONAL S.A**

# **MANUFACTURER'S TECHNICAL FILE**

**Reference of the product :** T3855 - NASSIO M MTD S3, T3854 - NASSIO

M MTD S3

Article code :

Technical file index: 01

Last update: OCTOBER 2021

## **IDENTIFICATION**

Reference of the product: T3855 - NASSIO M MTD S3, T3854 - NASSIO M MTD S3

Article Code : Basic model

Technical file index: 01

Last update : OCTOBER 2021

#### Manufacturer:

AIGLE INTERNATIONAL S.A 57 BOULEVARD DE MONTMORENCY,75016 PARIS FRANCE

tel: 33 (0)1 41 22 61 67

fax: N.A

### Factory:

Hui Sheng Shoes Clothing Co.,Ltd Westside-No:168,Xiafu Village,Chidian Town,Jinjiang City,Fujian Province China

Tel: 86 137 9989 6321

Fax: n.a

### **FOOTWEAR DESCRIPTION**

### **Footwear description:**

The classification of this footwear is: I : Footwear made from leather and other materials, excluding all-rubber or all-polymeric footwear

The design of this footwear is: B: ankle boot

### **Visual description:**

#### General view:





#### Outsole view:



Reference of the mould:

PLUTNO PRO

### Range of sizes:

39-48

### Construction and material of outsole:

Cement, EVA/Rubber Sole

### Field of use

construction filed, Logistics, Mining industry, Outdoors.

Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)					
		Applicable		Covered by	
			<b>√</b>	Standard	
§1	Requirements defined in the Annex II §1 are applicable to all PPE	<b>√</b>	<b>√</b>	Instruction for use	
	all PPE		<b>√</b>	Marking	
§1.4	Manufacturer's instructions and information is available	7		Standard	
			<b>√</b>	Instruction for use	
				Marking	
	PPE is designed and manufactured in a way that perspiration resulting from use is minimised. Otherwise it must be equipped with means of absorbing perspiration.	<	<b>✓</b>	Standard	
§2.2			<b>√</b>	Instruction for use	
				Marking	
	If it is known that the design performance of new PPE may be significantly affected by ageing, the month and year of manufacture and/or, if possible, the month and year of obsolescence must be indelibly and	<b>V</b>	<b>4</b>	Standard	
§2.4			<b>✓</b>	Instruction for use	
	unambiguously marked on each item of PPE placed on the market and on its packaging.		7	Marking	
	PPE is intended for use in potentially explosive atmospheres		~	Standard	
<b>§2.6</b>		<b>✓</b>	<b>√</b>	Instruction for use	
			<b>√</b>	Marking	
	PPE incorporating components which can be adjusted or removed by the user	7	<b>√</b>	Standard	
§2.9			✓	Instruction for use	
				Marking	
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	7	<b>✓</b>	Standard	
			<b>✓</b>	Instruction for use	
			<b>✓</b>	Marking	
	Multi-risk PPE	7	<b>✓</b>	Standard	
§2.14			<b>\</b>	Instruction for use	
			<b>✓</b>	Marking	
	The PPE is intended to protect against impact caused by falling or ejected objects and collisions of parts of the body with an obstacle	<b>V</b>	<b>√</b>	Standard	
§3.1.1			<b>✓</b>	Instruction for use	
			<b>✓</b>	Marking	
52424	The PPE is intended to protect against falls due to slipping	7	<b>✓</b>	Standard	
§3.1.2.1			<b>✓</b>	Instruction for use	
		<b>V</b>	✓ ✓	Marking	
62.2	The PPE is intended to protect against static compression of a part of the body		7	Standard Instruction for use	
§3.2			7		
§3.3	The PPE is intended to protect against mechanical injuries	✓	7	Marking Standard	
			<b>√</b>	Instruction for use	
			√ ✓	Marking	
§3.6	Protection against heat and/or fire	<b>V</b>	√ ✓	Standard	
			7	Instruction for use	
			7	Marking	
			تا	INIGI KILIK	

## **FOOTWEAR CONSTITUTION**

	Ref	Material	Color	
	VS-U9	cow full grain leather	dk.brown,brown	
UPPER	VS-U6	toe&counter: PVC	black	
UPPER	VS-U10	oxford fabric	dk.brown,brown	
	/	the binding of eyelet stay: fabric	black	
	VS-U5	cow suede leather	dk.brown,brown	
COLLAR	VS-U11	fabric	black	
COLLAN	VS-U2	insert - rubber patch	dk.brown/black/yellow,	
		·	brown/blue/yellow	
TONGUE	VS-U5	cow suede leather	dk.brown,brown	
1011002	VS-U11	fabric	black	
	VS-L1	sock lining - fabric + foam +membrane	black/white	
VAMP LINING	VS-L3	antistatic fabric webbing	black/white	
		(attached lining and insock)		
QUARTER LINING	VS-L1	sock lining - fabric + foam +membrane	black/white	
QUARTER LINING	VS-L2	collar/top tongue lining: mesh	black,blue	
INSOCK	VS-ISK1	mesh with hi-poly, removable	black/yellow/white	
OUTSOLE	PLUTNO PRO	EVA midsole	black, blue/black	
OUTSOLL	PLUTNO PRO	rubber outsole	black	
INSOLE	APMS-604	composite penetration resistance insole	white/blue	
TOE CAP	604	fiberglass toecap	beige	
INSERT	APMS-604	composite penetration resistance insole	white/blue	
	IIIIIIII	tongue:decorative plastic patch	black/yellow	
DECODATIVE ELEMANTE		plastic eyelets & hook + tongue webbing	black,blue	
DECORATIVE ELEMENTS		lace loop		
	7777777	quarter: decorative metallic accessory	black	

# **PROTECTION SCOPE**

### **Basic requirements:**

This product has been designed to be a safety footwear.

The technical rules are:

European Standard EN ISO 20344 : 2011 Personal protective equipment - test methods for footwear

European Standard EN ISO 20345: 2011: Personal protective equipement - Safety footwear

It is a category II product

Requirement of the standard EN ISO 20345 : 2011 concerning the value of the coefficient of friction of ceramic tiles floor with detergent solution and steel floor with glycerol (SRC)

Requirement of the paragraph 5.8.1. Design of the standard EN ISO 20345 : 2011 concerning cleated outsole.

At the date of certificate, the product is in compliance with Annex XVII of European REACh regulation (n° 1907/2006 and revisions)

### Additional requirements:

The additional requirements are:

- Closed seat region
- Antistatic footwear
- Energy absorption of seat region
- Fuel oil resistance
- Penetration resistance
- Water resistance (through test or machine method)
- Outsole :Resistance to hot contact


### **MARKING - PACKAGING**

### Information printed on the footwear:

- \* Logo of the Manufacturer
- \* Logo (€
- \* Manufacturer's type designation
- \* Postal address of manufacturer
- Footwear's reference

T3855 - NASSIO M MTD S3, T3854 - NASSIO M MTD S3

- \* Article code
- \* Size
- \* Year of manufacture and at least quarter
- \* The number and year of the Standard used
- \* The symbol(s) of the additional requirements

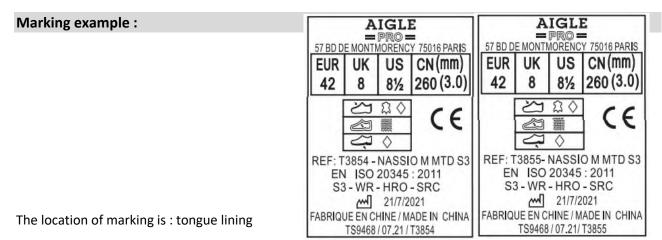

### Method of marking on the footwear:

printing on tongue lining

#### Packaging:

one pair of boot packed with color inner box / carton

# References of test reports performed in order to verify the compliance with the requirements of the technical rules :

Laboratory	References	Laboratory	References
СТС	D210406865_1	СТС	D210610828_1
CTC	D210406866_1	CTC	D210610848_1
CTC	D210406867_1	CTC	D210713013_1
CTC	D210507502_1	CTC	D210713016_1
CTC	D210507512_1	CTC	D210713017_1
CTC	D210507521_1	CTC	D210814526_1
CTC	D210507549_1	CTC	D210815845_1
CTC	D210610250_1	CTC	D210815982_1
CTC	D210610397_1	Intertek	GZHT91034516
CTC	D210610817_1		

### **MEANS OF CONTROL**

Generally we control the quality of our safety footwear as follows:

1/ we will test some important items, such as impact, compression, slip resistance during development of products. After all properties can meet the requirement, then we will put them into mass production; 2/ We will ask our raw material supplier to provide us good reports, for example, steel toecaps, we need good report for impact, compression; penetration resistance insert, we need report for penetration and flex resistance; and for leather we need report for tear strength, tensile strength, WVP and Cr VI. All report must be in accordance with correct standard, such as EN12568:2010 for toecaps and insert; EN ISO 20345:2011 for upper material.

3/ Our QC will make sure that the quality check must be performed strictly for each step. From cutting, stitching, lasting, injection and cleaning, if some problems are found, we must solve them at once in order that the good quality shoes can be produced smoothly;

4/ We will pick up some finished shoes from warehouse at random, and send them to testing company to perform impact, WR, penetratiom resistance, sole abrasion resistance, bonding strength per each Batch. 5/ Before shipment, we will ask our QC to carry out final inspection randomly. The whole goods can be delivered when the result of inspection is positive.

### PPE subject to ageing:

Peremption period: 5 years when stored in appropriate conditions (humidity, temperature, clean, ventilated, light). Before use, the footwear shall be visually controlled, in case of deterioration the footwear must be scrapped (abrasion, cut, tear, ...).

### **Declaration of conformity:**

Available on : www.aigle.com